


ANS1010TB

9W/m 10x10mm 24V IP67 Top Bend
Neon LED Strip Light



PRODUCT FEATURES

- Continuous And Even Dotless Light Effect.
- High CRI 90 - Delivers More Vibrant And True-To-Life Colours.
- Available Colour Temperatures: 2200K (Ultra Warm White), 3000K (Warm White) And 4000K (Cool White).
- Ingress Protection: IP67 - Suitable For Both Indoor And Outdoor Applications.
- Dimmable* - Compatible With A Dimmable Driver (Sold Separately).
- Maximum Lengths: 15 Metres (Powered From A Single End) Or 30 Metres (Powered From Both Ends)
- Cutting Intervals: Every 40mm For Precise Length Adjustment.
- Customisation: Bespoke Lengths And Configurations Available Upon Request.

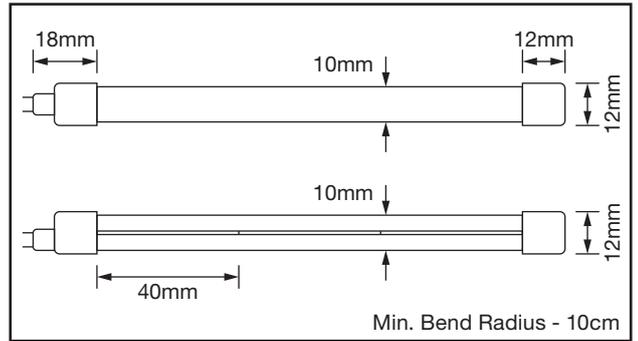

TECHNICAL SPECIFICATIONS

Product Code	ANS1010TB/22	ANS1010TB/30	ANS1010TB/40
Useful Luminous Flux (LM)	460lm/m	500lm/m	580lm/m
CCT (Kelvin)	2200K	3000K	4000K
Beam Angle (°)	120°	120°	120°
SDCM	<6	<6	<6
CRI	>90	>90	>90
Peak Intensity (cd)	161cd	178cd	202cd
Operating Voltage (V)	24V DC	24V DC	24V DC
Operating Output Power (W)	9W/m	9W/m	9W/m
Class	III	III	III
Body Material	Silicone	Silicone	Silicone
Cut Points	40mm	40mm	40mm
LED/m	150 LEDs/m	150 LEDs/m	150 LEDs/m
Reel Length	50m	50m	50m
Frame Colour	Polar White	Polar White	Polar White
Switching Cycles	>15,000	>15,000	>15,000
Ingress Protection	IP67	IP67	IP67
Ambient Operating Temperature (°C)	-20°C ~ +40°C	-20°C ~ +40°C	-20°C ~ +40°C
Guarantee†	3 Years	3 Years	3 Years
Dimmable	With Dimmable Driver	With Dimmable Driver	With Dimmable Driver
Lifetime (L70 B50)	30,000 Hours	30,000 Hours	30,000 Hours

ACCESSORIES*



End Caps
ANS1010/EC/IP67



Live Ends
ANS1010/LE/IP67



Mounting Clips
ANS1010/MC

*Sold Separately. †Marine use will make guarantee 2 years.
Do not use alcohol, chlorine, sulphur based chemicals on product.

