
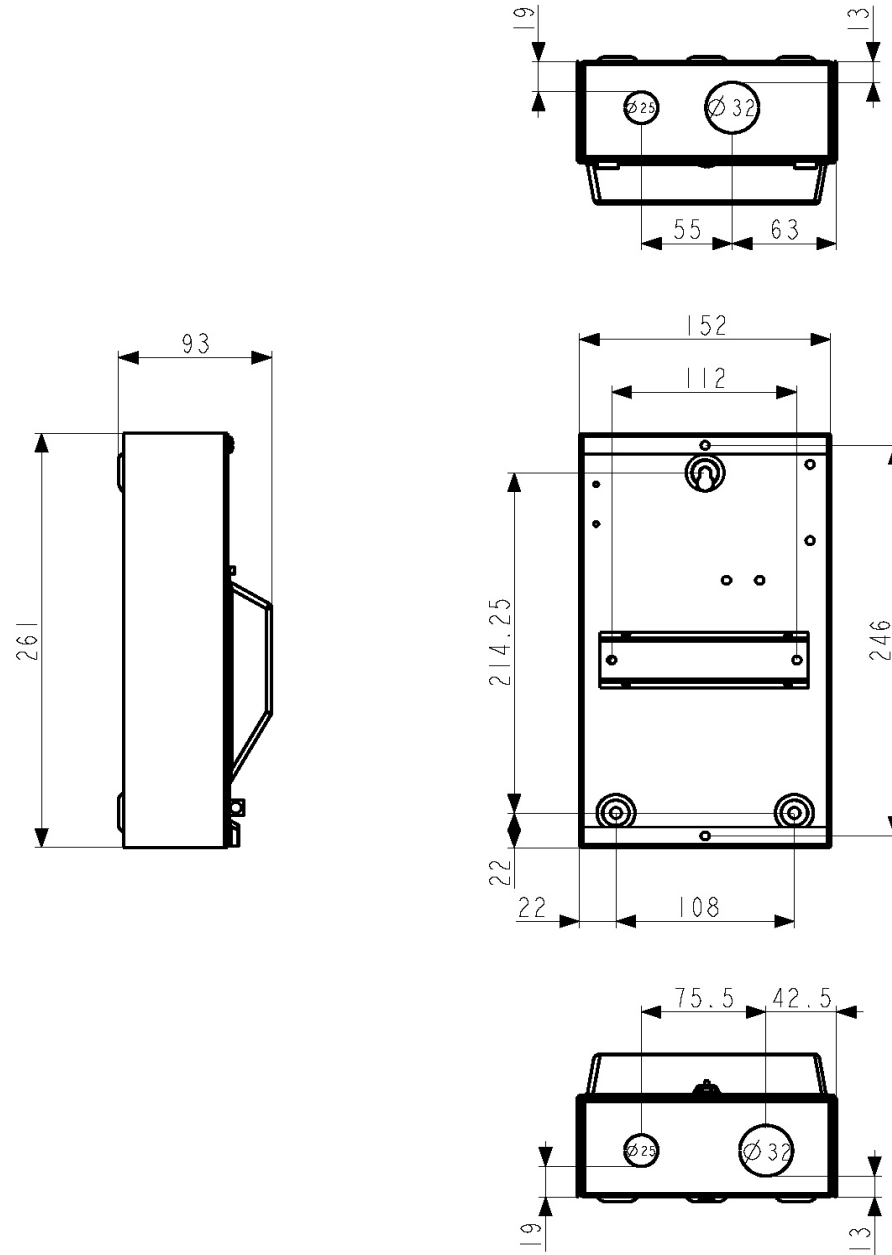





		EV CHARGER DISTRIBUTION BOARDS		
PART NUMBER	EV32ABDZ	EV40ABDZ		
GTIN-13	5060523526741	5060523526772		
RATING (A)	32A	40A		
RATED RESIDUAL OPERATING CURRENT (IΔn)	30mA	30mA		
RCBO /RCD TYPE	TYPE A (RCBO)	TYPE A (RCBO)		
MCB RATING/ Tripping Curve	B CURVE	B CURVE		
NUMBER OF POLES	1P+N (SWITCHED)	1P+N (SWITCHED)		
BI DIRECTIONAL	Y	Y		
T2 SPD	Y	Y		
DIMENSION DRAWING	4E	4E		
WEIGHT (1PC) Kg	2.5	2.5		
DIMENSIONS (HxWxD)mm	261x152x93	261x152x93		
DC MAX	6mA	6mA		
STANDARD		BS EN 61439-3		
RATED VOLTAGE (Un/AC)		230V		
FREQUENCY (Hz)		50/60		
PROTECTION DEGREE (IP)		2XC		
MAXIMUM TERMINAL BAR CAPACITY		16mm ²		
TERMINAL BAR TIGHTENING TORQUE (Nm)		2.0		
MOUNTING		35mm DIN RAIL		
MATERIAL		1mm STEEL		
FINISH		RAL 9001 POWDER COATED SMOOTH FINISH		
ACCESSORY PACK (4E)		CIRCUIT IDENTIFICATION LABELS		

DIMENSIONS

4E



EV32ABDZ

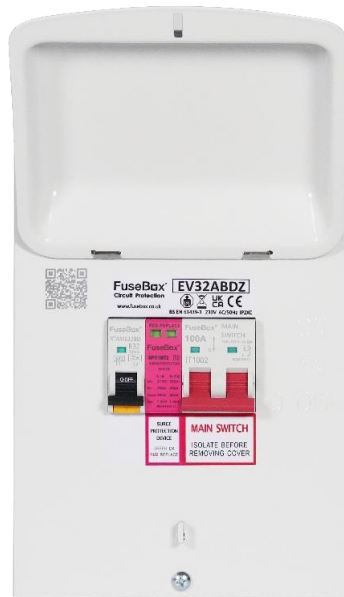

1P+N (SWITCHED) POLE MINI RCBO
BI DIRECTIONAL

